


SPF 3500~5000 ES

- Integrated MPPT charge controller.
- Equalization charging function.
- Work with battery or without battery.
- Maximum PV input voltage up to 450VDC.
- Configurable grid or solar input priority.
- Optional WIFI/ GPRS remote monitoring.
- Support parallel operation for capacity expansion up to 30kW.
- PV and Grid power the load jointly if PV energy insufficient.
- Flexibly schedule the Inverter charging and discharging time.

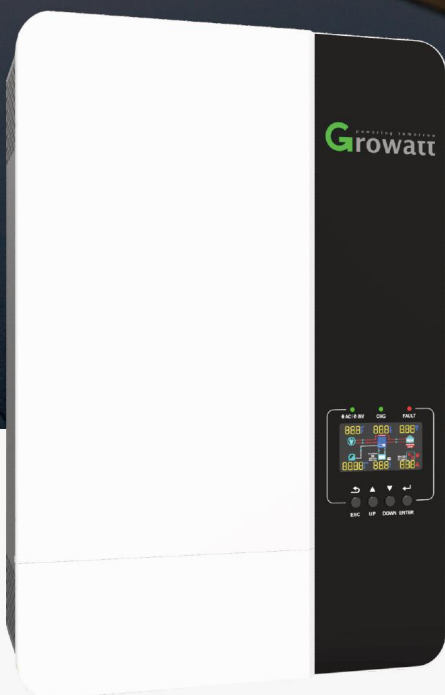

P O W E R
- I N G O
T O M O -
R R O W O

Growatt
powering tomorrow

Datasheet	SPF 3500 ES	SPF 5000 ES
Battery Voltage	48VDC	
Battery Type	Lithium/Lead-acid	
INVERTER OUTPUT		
Rated Power	3500VA/ 3500W	5000VA/ 5000W
Parallel Capability	Yes, 6 units maximum	
AC Voltage Regulation (Battery Mode)	230VAC \pm 5% @ 50/60Hz	
Surge Power	7000VA	10000VA
Efficiency (Peak)	93%	
Waveform	Pure sine wave	
Transfer Time	10ms typical, 20ms Max	
SOLAR CHARGER		
Maximum PV Array Power	4500W	6000W
MPPT Range @ Operating Voltage	120VDC ~ 430VDC	
Number of Independent MPP Trackers/ Strings Per MPP Tracker	1/1	
Maximum PV Array Open Circuit Voltage	450VDC	
Maximum Solar Charge Current	80A	100A
AC CHARGER		
Charge Current	60A	80A
AC Input Voltage	230 VAC	
Selectable Voltage Range	170-280 VAC (For Personal Computers) ; 90-280 VAC (For Home Appliances)	
Frequency Range	50Hz/60Hz (Auto sensing)	
PHYSICAL		
Protection Degree	IP20	
Dimension (W/H/D)	330/485/135mm	330/485/135mm
Net Weight	11.5kgs	12kgs
OPERATING ENVIRONMENT		
Humidity	5% to 95% Relative Humidity(Non-condensing)	
Altitude	<2000m	
Operating Temperature	0°C - 55°C	
Storage Temperature	-15°C - 60°C	



24/7
Power Supply



Automatic
Load Management



Free
Power Audit



Remote
Monitoring



After-Sales
Support

SYGNITE POWER AND ENERGY SOLUTIONS LTD. 📍 No 5 C & I Leasing Drive, Lekki Phase 1, Lagos, Nigeria.

☎ +234 808 307 3047, +234 907 252 6689 📞 +234 808 307 3047 📧 @sygniteng 🌐 sygnitepower

✉ info@sygniteng.com